



ISO-9001
Certified Company
FM537405




ADVANCE PRODUCTS & SYSTEMS
FLANGE ISOLATING
GASKET KITS




FLANGE ISOLATING GASKET KITS

DOUBLE ISOLATION SET

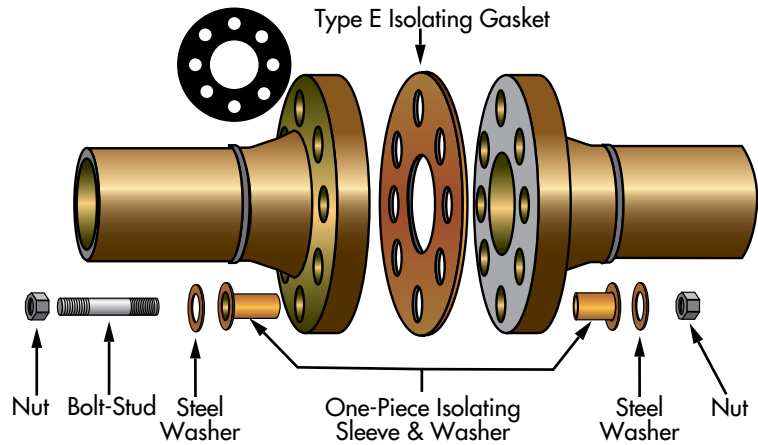


SINGLE ISOLATION SET

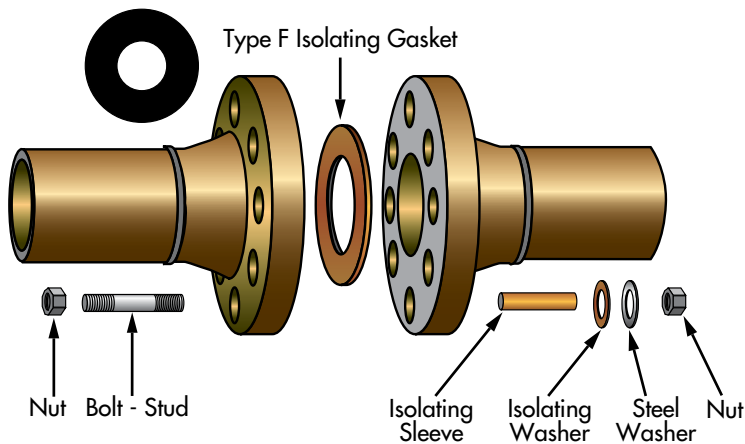

Introduction

With the economic and environmental climate of today it is more important than ever to prevent leakage in your carrier system. Flanges, the most common trouble area, need to be sealed properly to prevent this leakage and must also be cathodically isolated to prevent stray currents which cause undo corrosion and eventual breakdown of the metal.

Advance Products & Systems manufactures and maintains a supply of quality products and materials which can help solve most flange sealing problems to prevent leakage, preventing corrosion, and saving the integrity of the pipeline.

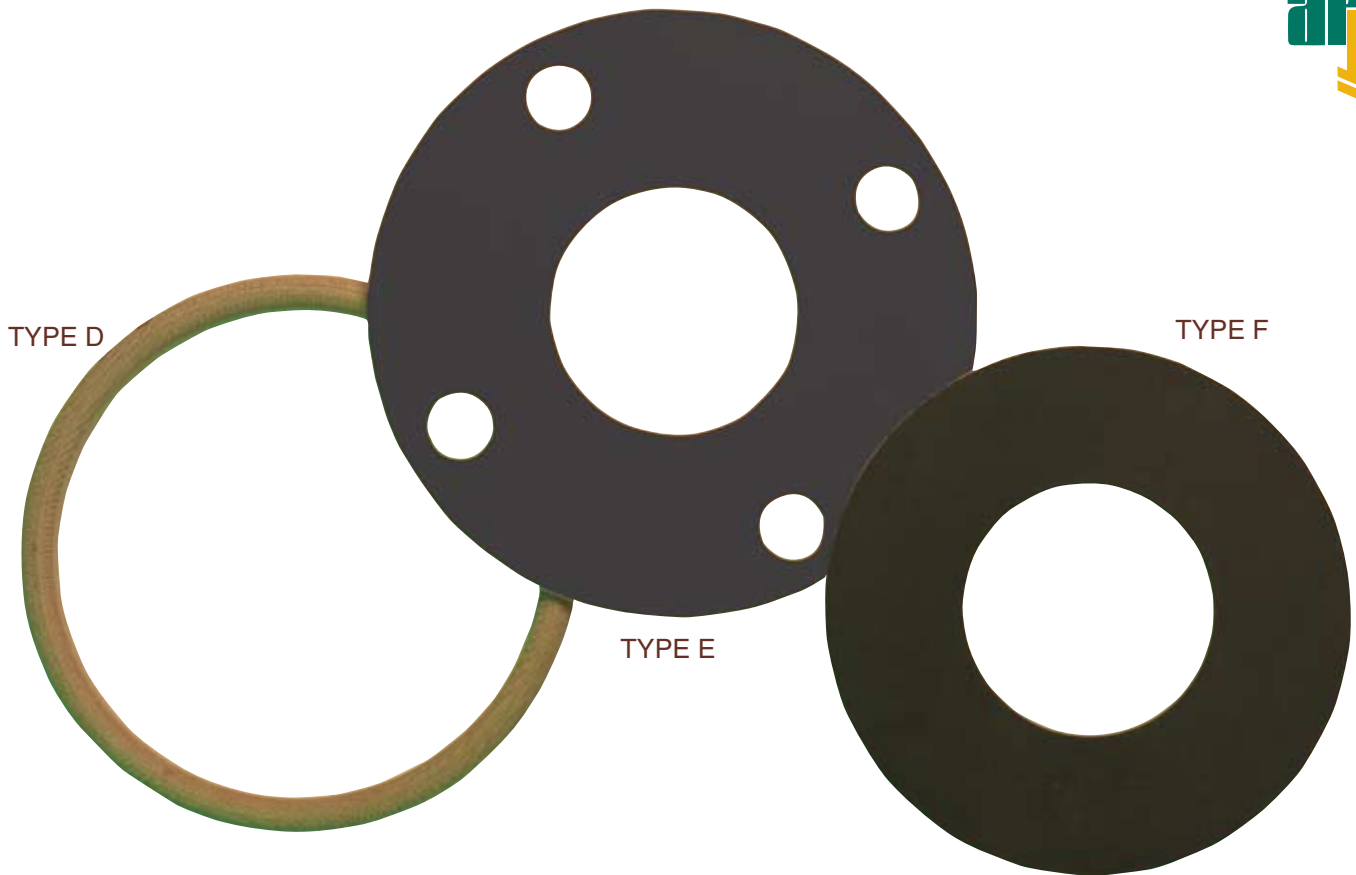

Type	Water Absorption %	Tensile Strength PSI	Compression Strength - PSI	Dielectric Values VPM	Max. Continuous Operating Temp.	
CE	3.5	12,000	34,000	400	257° F	125° C
G7	0.09	22,000	40,000	400	400° F	204° C
G10	0.01	40,000	66,000	800	248° F	140° C
G11	0.20	43,000	63,000	900	347° F	175° C
XPN	1.5	18,000	45,000	600	266° F	130° C
XP	1.5	18,000	45,000	600	266° F	130° C

TYPE D

Type D gaskets are specifically designed to fit into the ring groove of ring-type-joint flanges. They are manufactured of a medium weave, fabric-reinforced phenolic material and are sized to ANSI and API specifications - available in basic oval as well as octagonal shape. Also available are BX gaskets with pressure ratings to 15,000 PSI. Standard thickness of 1/8".

TYPE E

Type E is a full-faced gasket with the same outside diameter as the flange and precision cut bolt holes. This design facilitates proper alignment of the gasket during installation and foreign material is prevented from shorting the flange isolation. Type E gaskets are available in plain faced or Nitrile® faced phenolic, as well as a variety of high temperature materials. Standard thickness of 1/8".


TYPE F

Type F gaskets are made to fit the raised face portion of the flange only. As there are no bolt holes in the F gasket, the inside diameter of the bolt hole circle is slightly smaller than the outside diameter of the gasket, assuring an exact, automatic positioning of the gasket. Available in the same materials as the type E gasket. Standard thickness of 1/8".

Advance Flange Isolation Gasket Kits are manufactured according to ANSI B16.5 specifications up to 24". Above 24", please provide the specifications of your flange using our convenient worksheet. Technical assistance is available upon request.



THE TROJAN

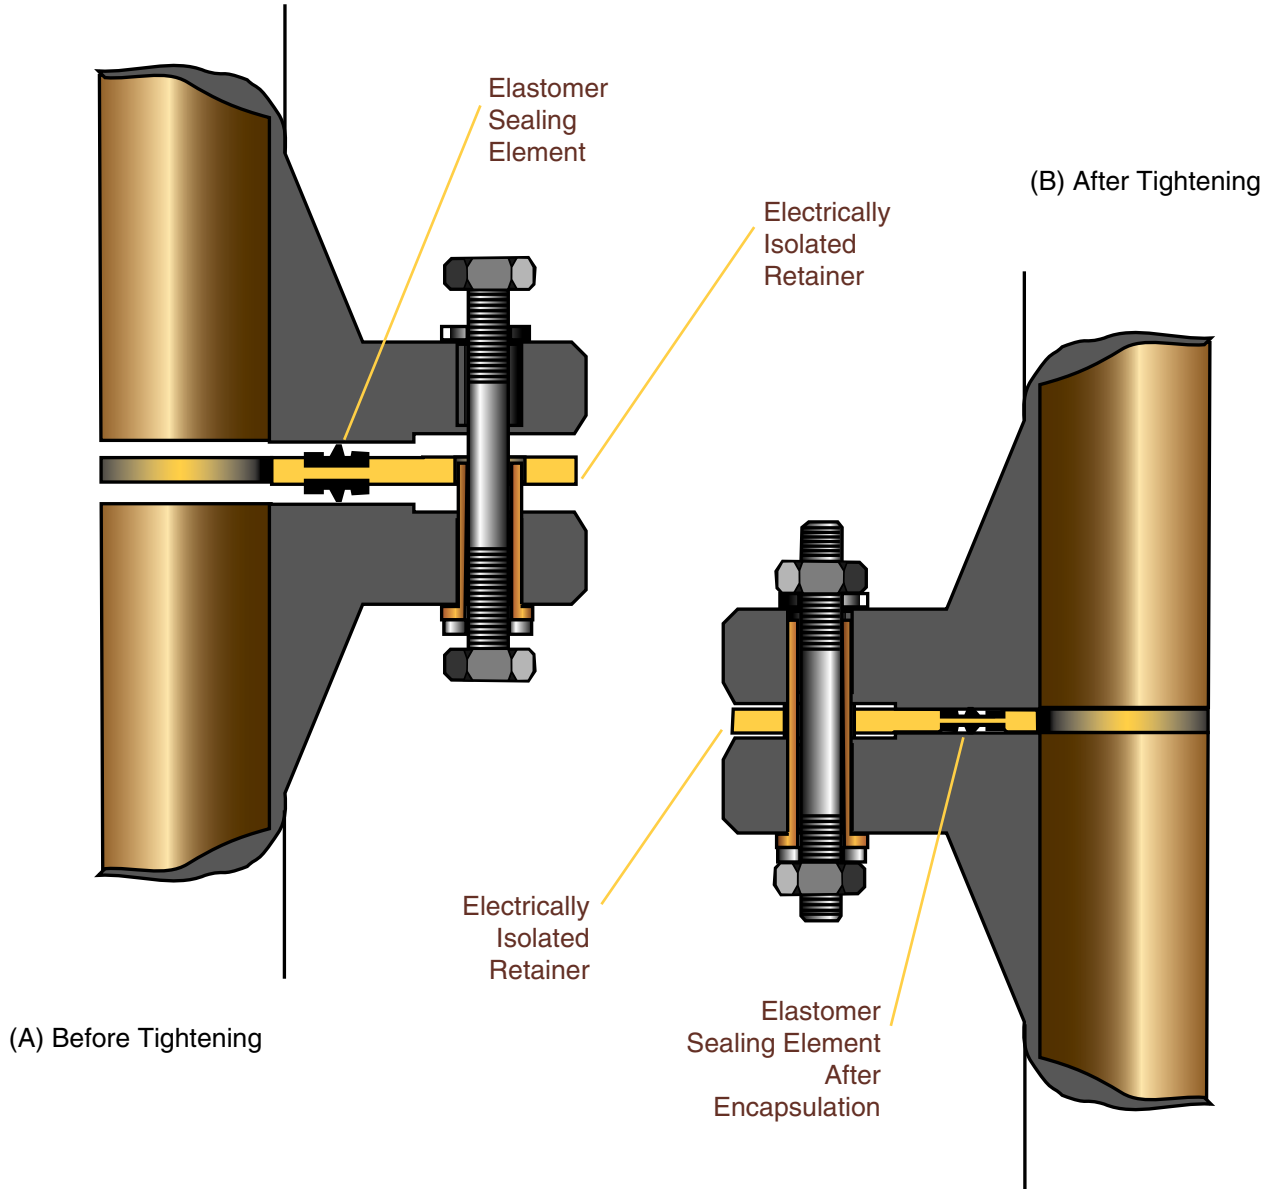

TROJAN SEALING GASKETS

Trojan gaskets are state-of-the-art in near zero leakage static sealing.


The elastomer sealing element is encapsulated in the electrically isolated retainer. Our most popular sealing element materials are Nitrile® (-60°/240°F min./max. operating temperature), Viton® (-75°/400°F), and Teflon® (-100°/450°F). The encapsulation of the sealing element permits only micro-exposure of the seal to hostile environs of fire, chemicals and corrosive fluids.

Because the controlled confinement of the elastomer sealing ring within the available volume of the groove in the retainer, 92% to 94% filled volume, a consistent controlled-pressure seal can always be obtained without tremendous bolt loads. Reduced loads allow for reduced flange thickness, smaller bolts and smaller circles.

ADVANTAGES OF THE TROJAN


- Can be utilized with mismatched flanges
- Can be utilized with misaligned flanges
- Can be used in place of RTJ rings

- Little initial torque required
- No re-torquing required
- Sealing ring cannot be left out
- Seal design tested for high pressures. Please consult factory for specific pressures
- Reusable
- Competitive price
- Limited area of seal exposed (long fire life)
- Compensates for pressure fluctuations, compression changes, vibrations, temperature, etc.
- Greatly reduces human error during installation
- Large selection of materials available
- Three to four times the dielectric strength necessary
- Low installation and maintenance costs
- Gaskets through 144"

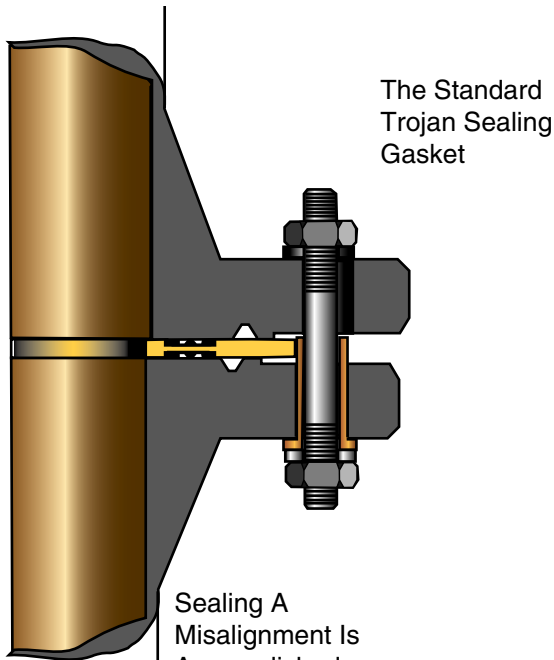

Sealing A Misalignment Is Accomplished With The APS Trojan

Inside Seals Are The First Layer Of Protection

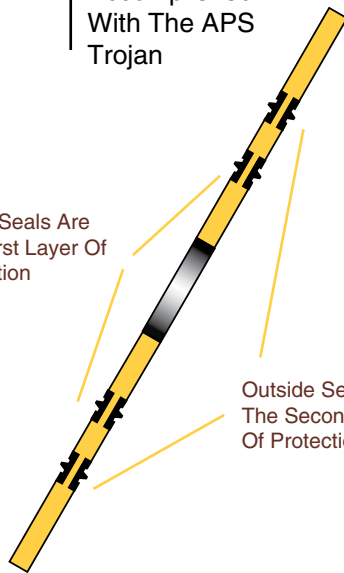


Cross Section Of The Quad-Seal Trojan Sealing Gasket

Outside Seals Are The Second Layer Of Protection

Elastomer Sealing Element

Electrically Isolated Retainer

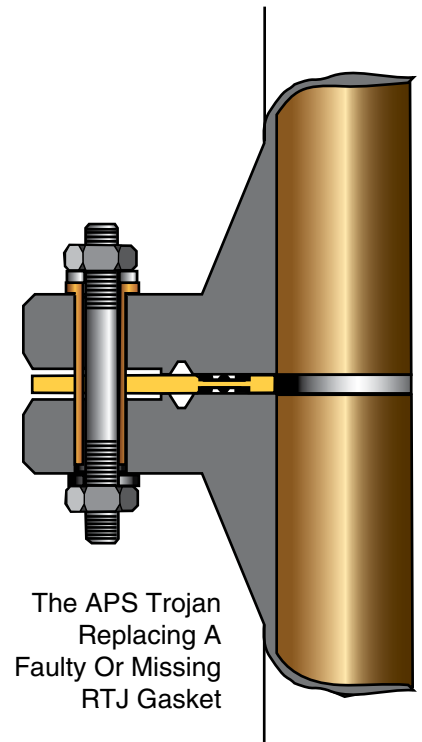

The cross section of APS's Trojan Sealing Gasket (A) shows the elastomer sealing element as it appears before compression between flanges. This compression causes the seal to effectively fill the void of the groove and encapsulate, (B) permitting only micro exposure of the actual seal to hostile elements either from within or without.

QUAD SEAL TROJAN

Four seals on the new Quad-Seal Trojan further ensures the integrity of the sealing capability of an already-proven reliable gasket. For areas where absolute zero leakage is a must, the Quad-Seal Trojan works twice as hard.

All too often, difficult sealing situations arise from mismatched or misaligned flanges. A quick, cost effective solution is the APS Trojan. Also, used in place of damaged or missing RTJ gaskets, the Trojan forms a quick, static seal. The Trojan is often the reasonable alternative to flange replacement.


Sealing Elements Available In:

Material	Min. Operating Temperature	Max. Operating Temperature
Nitrile®	-60° F	240° F
Viton®	-75° F	400° F
Teflon®	-100° F	450° F

"Unlike the W shape of our other seals, Teflon® seals are flat."




ISOLATING SLEEVES & WASHERS • FLANGE PROTECTORS



Sleeves & One-piece Sleeve & Washer

RADOLID® PROTECTION CAP

Radolid® Protection Caps from APS protect nuts and bolts from destructive corrosion. Caps are easily pressed onto the bolted joints by hand, snapping into place when in position. We recommend loading caps with APS's high melt corrosion inhibitor grease for added protection.



Material	Dielectric Strength volts/mil	Water Absorption %	Max. Continuous Operating Temperature	
Polyethylene	450	.01	105° F	41° C
Phenolic	400-500	1.1	225° F	107° C
Mylar	4,000	.8	300° F	149° C
Minlon	1,200	.22	250° F	121° C
Nomex	400	-	450° F	232° C
G-10	530	.09	285° F	140° C

FLANGE PROTECTORS

Kleerband® and Stainless Steel Flange Protectors and Radolid® Protection Caps, two additional ways to further seal flanges from corrosion.

ISOLATING SLEEVES AND WASHERS

Isolating sleeves manufactured of high density polyethylene, NEMA grade LE phenolic, and Mylar are available in a full range of sizes. Also available are one-piece integral sleeves and washers which are made of Minlon, providing superior compression strength. Integral sleeves are available in sizes through 1-1/2". A variety of high temperature sleeves are also stock items.


With each insulating washer a 1/8" thick S.A.E. electro-plated steel washer is provided to protect the isolating washer from damage by the nut. Advance flange isolation sets are available in single or double washer kits.

FLANGE PROTECTOR

Advance flange protectors and corrosion inhibitor grease are recommended on all isolated flanges. By encapsulating the flange cavity with the flange protector and injecting our


corrosion inhibitor grease, you can rely on your cathodic protection system to provide you with years of trouble free service.

This system totally eliminates any possibility of foreign material lodging between the faces of your flange or corrosion bridging across and creating a short.



Special Application Gaskets

High Temperature Products



HIGH TEMPERATURE PRODUCTS

GASKETS: NEMA grades G7 and G10, Durabla, Durlon, JMRD940

SLEEVES: Nomex, NEMA grades G7 and G10, Durabla, Durlon

WASHERS: NEMA grades G7 and G10, Durabla, Durlon

Other high temperature materials are available upon request. It is recommended that the factory be contacted to discuss technical data on the above referenced products.

SPECIAL APPLICATION

Advance Products and Systems, Inc. is well equipped to make those special isolation pads and gaskets sometimes required for odd shaped connections. We can manufacture any configuration or design needed.

These applications include special closures, vaults, steel boxes, special connectors, utility and light poles.

If it needs to be sealed...we can be of service.

PACKAGING

Each Advance flange isolation gasket kit is packaged individually in durable corrugated boxes. Isolating sleeves and washers are packaged separately and are cushioned within the box to protect them from damage during shipment. Each set is clearly tagged with flange size, pressure rating, type of isolating sleeve and whether it is a single washer or double washer set. A recommended bolt tightening sequence is provided with each kit.

TO ORDER PLEASE SPECIFY THE FOLLOWING

- Gasket Type D, E or F
- Flange Size and Pressure Rating
- Single Washer or Double Washer Sets (SW or DW)
- Sleeve Material
- Retainer Material
- Sealing Element (Nitrile®, Viton® or Teflon®)

OTHER PRODUCTS AVAILABLE

- Advance Flange Band Protectors (Stainless Steel or Kleerband®)
- Radolid® Nut Protective Caps
- Casing Insulators and End Seals
- Specialty Products Manufactured of Phenolic and other materials
- INNERLYNX® - Wall/pipe Penetration Seals & Wall Sleeves
- ISOJOINT® - Monolithic Insulating Joints
- Foreman® Night Caps
- Duocon® Centralizers
- Safety Spray Shields
- U-Bolt Cote®

BSI Management
Systems America, Inc.

ISO 9001:2000
REGISTERED
COMPANY

CERTIFICATE # FM 537405

FORMERLY QMI # 1041990



**ADVANCE
PRODUCTS & SYSTEMS, INC.**

P. O. Box 60399 • Lafayette, Louisiana 70596-0399

800-315-6009 • 337-233-6116 • FAX: 337-232-3860

Email: sales@apsonline.com • Website: www.apsonline.com

DISTRIBUTED BY

APS Warranty and Return Policy

The customer is responsible for requesting an RMA in written form; either through e-mail or fax, unless otherwise noted. The customer will incur the cost of return freight. No credit is allowed on outgoing freight. A request for return of material must be submitted within 90 days from the invoice date. All hardware/components must be included and returned to APS within 30 days of the RMA issuance to qualify for credit. The returned product/products must be shipped in clean "re-sellable" condition, accompanied by all RMA paperwork including APS RMA labels affixed to the returned products packaging, or the return will not be accepted by APS receiving department and credit will not be issued. Credit will be determined upon the actual count and inspection by APS' receiving department. Credit allowed towards future purchases only **must be** used within one year of date of credit being issued. APS reserves the right to refuse credit for custom orders.

The above warranty is made in lieu of, and APS disclaims any and all other warranties expressed or implied, including the warranties of merchantability and fitness for a particular purpose and buyer agrees to accept the products without any such warranties.

APS hereby disclaims any obligation or liability for consequential damages, labor costs or any other claims or liabilities of any kind whatsoever.

Advance Products & Systems, Inc. is not responsible for errors printed in this brochure.